

Ionpure® VNX-EX High Flow Continuous Electrodeionization (CEDI) Modules

IONPURE VNX Module—VNX-EX Continuous Electrodeionization Module

The VNX-EX module is designed with proven IONPURE® continuous electrodeionization (CEDI) technology to produce high purity water. Performance has been tuned for ultrapure water demands of the microelectronics industry.

Each VNX-EX industrial module has a nominal flow rate of 50.0 gpm (11.4 m³/hr). Multiple 50 gpm modules provide for system designs with flow rates up to, and greater than 1000 gpm.


VNX-E Series Features

- » Guaranteed 18 megohm-cm product Resistivity, optimized for microelectronics and UPW systems
- » Silica and Boron removal $\geq 99\%$
- » Sodium and Chloride removal $\geq 99.9\%$
- » 95-97.5% recovery for loop usage and high water savings
- » No need for acid/caustic, neutralization systems or tank exchanges
- » Significantly lower operating cost compared to conventional ion exchange systems
- » Robust, guaranteed leak free operation
- » Continuous production of consistent quality
- » Low operating costs and compact footprint

IONPURE



For additional information call 866-876-3340 or visit our web site at www.ionpure.com.

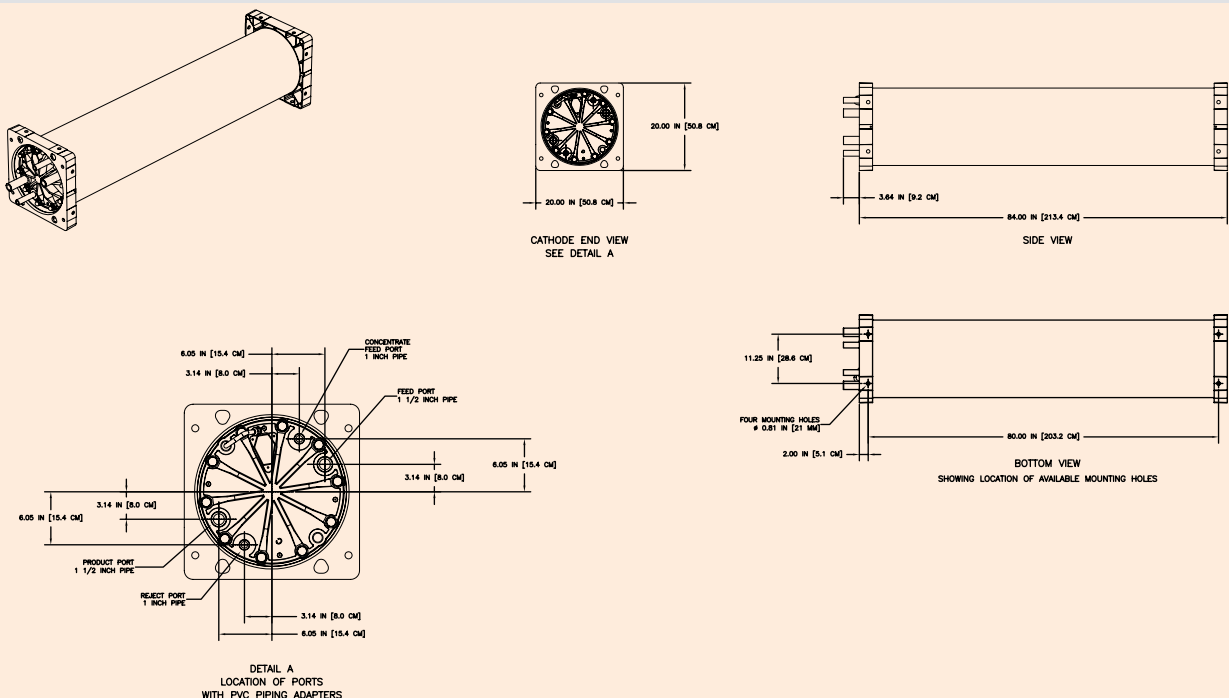

Ionpure® VNX-EX

High Flow

Continuous

Electrodeionization

(CEDI)

MAXIMUM FEED WATER SPECIFICATIONS

Feed Water Conductivity Equivalent, including CO ₂ and Silica	< 10 µS/cm
Feed Water Source	RO permeate (2 pass) or DI Water
Temperature	68–113 °F (20–45 °C)
Inlet Pressure	30–100 psi (1.4–7 bar)
Maximum Total Chlorine (as Cl ₂)	<0.02 ppm
Iron (Fe)	<0.01 ppm
Manganese (Mn)	<0.01 ppm
Sulfide (S ⁻)	<0.01 ppm
pH	4–11
Total Hardness (as CaCO ₃)	<0.1 ppm
Dissolved Organics (TOC as C)	<0.5 ppm
Silica (SiO ₂)	<1.0 ppm

TYPICAL MODULE PERFORMANCE

Operating Parameters

Recovery	95-97.5%
Flow Rate: minimum	33 gpm (7.5 m ³ /hr)
Flow Rate: nominal	50.0 gpm (11.4 m ³ /hr)
Flow Rate: maximum	66 gpm (15.0 m ³ /hr)
DC Voltage	0–600
DC Amperage	0–20

Product Water Quality

Product Resistivity - 2 Pass RO - DI Water	>17.5 megohm-cm (see note below) > 18 megohm-cm
---	--

Note: Actual performance may be determined using the IP-Pro projection software available from Ionpure.

Silica (SiO ₂) Removal	99%
Boron (B) Removal	99%
Sodium (Na) Removal	≥ 99.9%
Chloride (Cl) Removal	≥ 99.9%

PHYSICAL SPECIFICATIONS

Diameter	Width	Height	Length	Shipping Weight	Operating Weight
17.5" (44.45 cm)	20.0" (50.8 cm)	20.0" (50.8 cm)	84.0" (213.3 cm)	610 lbs (276.7 kg)	825 lbs (374.2 kg)

OPERATING ENVIRONMENT

Installation should be indoors with no direct sunlight and it should have a maximum ambient room temperature of 113°F (45°C).

MATERIALS CONSTRUCTION

1. Wetted components of the VNX module consist of: PVC, polypropylene, ion-selective membranes, ion exchange resins, and thermoplastic elastomer.
2. Housing is fiberglass reinforced plastic (FRP). Standard color is white with glossy finish.
3. The Flexmount bracket/end-block assembly is an epoxy painted aluminum casting suitable for securing modules to the frames and/or each other in Ionpure approved configurations.

QUALITY ASSURANCE STANDARDS

CE marked. Each module is factory tested to meet strict IONPURE and industry standards and is manufactured in an ISO 9001:2000 facility.

ORDERING INFO

1. Each VNX module has four process connections: Feed, Concentrate Feed, Product, and Reject. End plugs are included with the module.
2. Use with Ionpure Connector kit (Part# IP-VNX-CK-PVC or PP) which include four (4) PVC or Polypropylene end connectors.
3. Also, use Optional Ionpure Junction box kits (Part# IP-IP-VNX-JB-6, IP-VNX-JB-12, or IP-VNX-JB-25) which include a NEMA 4X junction box, quik connector and 6', 12' and 25' power cable, respectively.

CONFIGURATION DETAILS

The VNX modules are tested for performance verification individually. All VNX module are factory tested.

The information provided in this brochure contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of the contract.

Ionpure is a trademark of Siemens its subsidiaries or affiliates.

Siemens
10 Technology Drive
Lowell, MA 01851
Tel: 866.876.3340

www.ionpure.com
Printed in U.S.A.
ION-VNXEX.I-DS-1207
©2007 Siemens Water Technologies Corp.
Subject to change without prior notice.