




Product Data Sheet

AmberTec™ UP6040 H/OH Ion Exchange Resin

Non-Separable, Uniform Particle Size, Mixed Bed Ion Exchange Resin for Demineralization Applications and Ultimate Polishing for the Semiconductor Industry

Description

AmberTec™ UP6040 H/OH Ion Exchange Resin is a semiconductor-grade ion exchange resin mixed bed which is specifically designed and manufactured for final polishing service in the highest-purity water treatment applications. This pre-mixed resin product is composed of an equivalent mixture of high-capacity, fully regenerated strong acid and strong base gel-type ion exchange resins on a 1:1 equivalent basis. The resin mixture exhibits no clumping. The particle size of the component resins is specially designed to reduce the natural tendency of cation and anion resins to separate when handled in a water slurry. This ensures perfect mixed bed equilibrium performance, since the resins will remain intimately mixed in the final polishing vessels. The uniform particle size of the resins maximizes the kinetic performance of the mixed bed allowing the use of high service flowrates to achieve the ultimate balance of pressure drop and purity. All these characteristics are essential to produce water of the highest achievable purity with a minimum volume of rinse water.



AmberTec™ UP6040 H/OH is specifically designed for use in non-regenerable final polishing mixed beds in ultrapure water systems in the semiconductor industry and similar demanding applications. The leakage of all ionic species, silica, boron, total organic carbon, and sub-micron particles have all been driven to a low level with AmberTec™ UP6040 H/OH resin. Free of the limitations imposed by regenerable systems, the characteristics of this semiconductor-grade mixed bed resin concentrate on optimal properties during service.

AmberTec™ UP6040 H/OH is not recommended for use in regenerable mixed bed applications.

Applications

- Non-regenerable, polishing mixed beds

Historical Reference

AmberTec™ UP6040 H/OH Ion Exchange Resin has previously been sold as AMBERJET™ UP6040 Ion Exchange Resin.

Typical Properties

	Cation Resin	Anion Resin
Physical Properties		
Copolymer	Styrene-divinylbenzene	Styrene-divinylbenzene
Matrix	Gel	Gel
Type	Strong acid cation	Strong base anion
Functional Group	Sulfonic acid	Trimethylammonium
Physical Form	Dark amber, translucent, spherical beads	White to yellow, translucent, spherical beads
Ionic Ratio	1:1	1:1
Chemical Properties		
Ionic Form as Shipped	H ⁺	OH ⁻
Total Exchange Capacity	≥ 2.00 eq/L (H ⁺ form)	≥ 1.10 eq/L (OH ⁻ form)
Water Retention Capacity	45.0 – 51.0% (H ⁺ form)	54.0 – 60.0% (OH ⁻ form)
Ionic Conversion		
H ⁺	≥ 99%	
OH ⁻		≥ 95.0%
CO ₃ ²⁻		≤ 5.0%
Cl ⁻		≤ 0.5%
Particle Size §		
Particle Diameter	525 ± 50 µm	630 ± 50 µm
Uniformity Coefficient	≤ 1.20	≤ 1.20
< 425 µm	≤ 0.5%	≤ 0.5%
> 850 µm	≤ 5.0%	
> 1180 µm		≤ 2.0%
AmberTec™ UP6040 H/OH		
Ultrapure Water Performance		
Resistivity at 10-min UPW Rinse		> 17.9 MΩ · cm †
Resistivity at 10-min Salt Challenge		> 17.8 MΩ · cm †
ΔTOC at 2h00 Rinse		≤ 3 ppb C
Density		
Shipping Weight		710 g/L

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 45-D00954-en).

† Based on 18.2-MΩ · cm feedwater

Suggested Operating Conditions

Temperature Range †	15 – 25°C (59 – 77°F)
pH Range (Stable)	0 – 14

† Operating at elevated temperatures, for example above 60 – 70°C (140 – 158°F), may impact the purity of the loop and resin life. Contact our technical representative for details.


For additional information regarding recommended minimum bed depth, operating conditions, and regeneration conditions for [mixed beds](#) (Form No. 45-D01127-en) or [separate beds](#) (Form No. 45-D01131-en) in water treatment, please refer to our Tech Facts.

Hydraulic Characteristics

Estimated pressure drop for AmberTec™ UP6040 H/OH Ion Exchange Resin as a function of service flowrate and temperature is shown in Figure 1. These pressure drop expectations are valid at the start of the service run with clean water.

Figure 1: Pressure Drop

Temperature = 10 – 60°C (50 – 140°F)

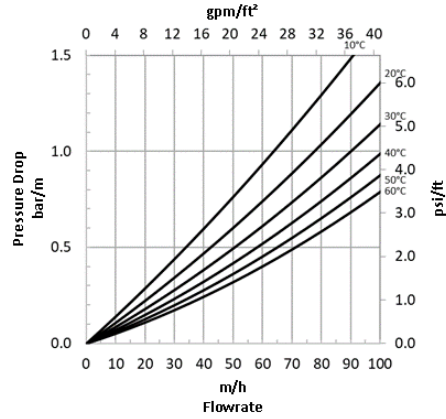


Quality Assurance

AmberTec™ UP6040 H/OH Ion Exchange Resin is tested by DuPont for resistivity, total organic carbon (TOC), and kinetic performance. This ensures that all batches of AmberTec™ UP6040 H/OH will meet stringent ultrapure water (UPW) performance requirements on these most critical parameters.

DuPont Water Solutions will fully support the quality and performance of AmberTec™ UP6040 H/OH in UPW applications to assure full customer satisfaction with the product as delivered.

Typical rinse curves for resistivity and total organic carbon (TOC) as a function of rinse time based on our quality control procedure for AmberTec™ UP6040 H/OH are shown in Figure 2.

Figure 2: Resistivity and TOC Rinse Performance

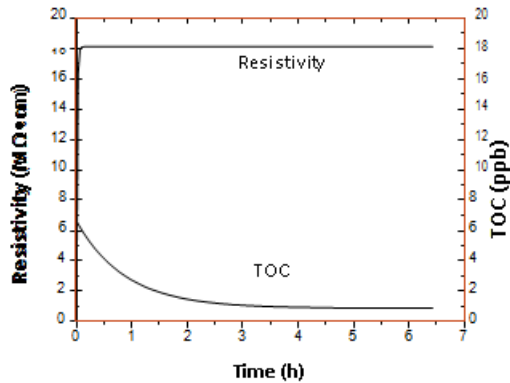

Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Have a question? Contact us at:

www.dupont.com/water/contact-us

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ℠ or ® are owned by affiliates of DuPont de Nemours Inc. unless otherwise noted. © 2020 DuPont.

